



Eubank®

- Front Access
- Easy Installation
- Durable Long Lasting Quality
- High Performance

R410A Wallmounts

V Series Air Conditioners • H Series Heat Pumps



Modular facilities



Telecom buildings



Trailers


Features:

- Copeland scroll compressors
- 16 gauge galvanized steel construction
- 1000 hour salt spray rated powder coated baked paint finish
- Plastic drain pan
- All brazing joints are brazed by certified brazers
- AHRI Certified
- Easy access to both sides of the condenser coil for servicing
- Service the unit from the front
- A/C models use reliable flow rater and pistons for refrigerant control
- H/P models use reliable Thermal Expansion Valves for refrigerant control

Options:

- Electric heaters
- High/low pressure switches
- Low ambient packages
- 2" pleated filters
- Return and supply grilles
- Coated coils
- Economizers
- Powered room ventilators (PRV)
- Lead-lag controllers
(not available for heat pump models)
- 4 & 5 ton models with 3 ton back plates
(economizer not available with this option)
- Choice of skin color: Mesa Tan (Standard) and White
- Room thermostat

NOMENCLATURE

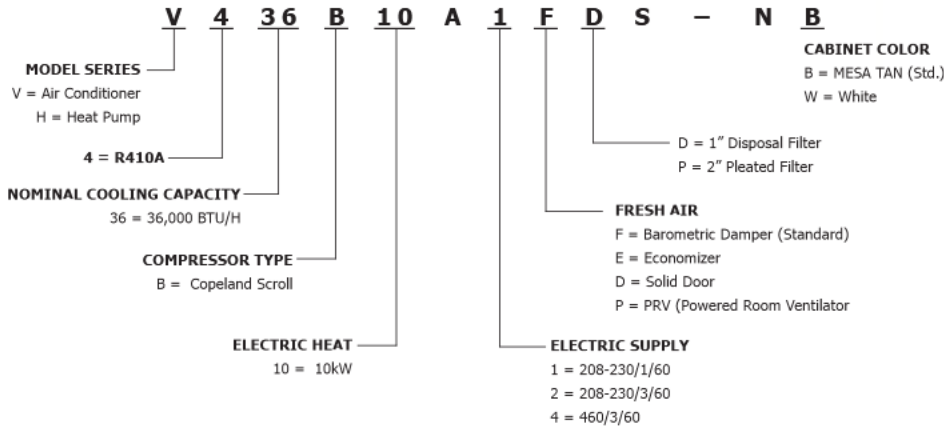

V Series Air Conditioner

| Nominal Tonnage | 1.5 | 2 | 2.5 | 3 | 4 | 5 |
|-----------------|---------|---------|---------|---------|---------|---------|
| Model | V418B** | V424B** | V430B** | V436B** | V448B** | V460B** |
| 208-230/1 | A1 | A1 | A1 | A1 | A1 | A1 |
| 208-230/3 | | A3 | A3 | A3 | A3 | A3 |
| 460/3 | | | | A4 | A4 | A4 |
| Blower CFM | 615 | 780 | 1100 | 1150 | 1700 | 1980 |
| Max Fresh Air | 175 | 195 | 288 | 353 | 425 | 495 |

H Series Heat Pump

| Nominal Tonnage | | 2 | 2.5 | 3 | 4 | 5 |
|-----------------|--|---------|---------|---------|---------|---------|
| 208-230/1 | | H424B** | H430B** | H436B** | H448B** | H460B** |
| 208-230/3 | | A1 | A1 | A1 | A1 | A1 |
| 460/3 | | A3 | A3 | A3 | A3 | A3 |
| | | | | A4 | A4 | A4 |
| Blower CFM | | 780 | 1100 | 1150 | 1700 | 1980 |
| Max Fresh Air | | 195 | 288 | 353 | 425 | 495 |

** Electric Strip Heat in kW

Approved Unit and Heater Combinations

| Nominal Tonnage | | 1.5 | 2 | 2.5 | 3 | 4 | 5 |
|--------------------|------|-----|---|-----|---|---|---|
| 208-230/1 | 5kW | X | X | X | X | X | X |
| | 10kW | X | X | X | X | X | X |
| | 15kW | | | | X | X | X |
| | 20kW | | | | | X | X |
| 208-230/3 460/3 | 6kW | X | X | X | X | X | X |
| | 9kW | X | X | X | X | X | X |
| | 15kW | | | | X | X | X |
| | 18kW | | | | | X | X |



Eubank is a registered trademark of National Coil Company. Due to manufacturer's policy of continuous product improvement, the manufacturer reserves the right to make changes without notice. All product specifications reflect available information at the printing of this brochure.

© 2011 National Coil Company. All rights reserved.

