

MAXXAIR[®]

VENTILATION SOLUTIONS

YOUR #1 CHOICE FOR RV VENTILATION




THE ONLY VENT COVER TUFF ENOUGH 6-YEAR Limited WARRANTY*

*see website for warranty details

THE MAXXAIR ORIGINAL VENT COVER

- ▶ Lets in **FRESH AIR ANY TIME**. . . Rain or Shine!
- ▶ Prevents Heat Buildup in your RV
- ▶ Proven **SUPER-TOUGH** one piece design
- ▶ Mounts to all existing 14" x 14" roof vents **INCLUDING** the new Ventline E-Z Lift Ventadome
- ▶ **Not recommended for High-Powered Fans** like MAXXFAN, MAXXFAN Plus Fans, ShurFlo Fan or Fantastic Fan. Use instead the **NEW FANMATE[®]** cover shown on the back of this sheet.

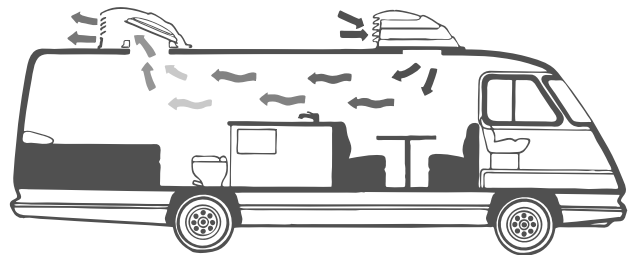

INSTALLATION INSTRUCTIONS

READ AND SAVE THESE INSTRUCTIONS

1. Place the MAXXAIR over the roof vent with the louver area facing the rear of the vehicle. After verifying that the MAXXAIR is centered over the roof vent, use a pencil to trace the location of the slots in the MAXXAIR mounting flange.
2. Position a mounting bracket on your roof so that the slot in the bracket intersects one of the locations traced on the roof. For maximum strength, place the mounting brackets as close as possible to the outside corner of your existing roof vent frame.
3. Mark the location of the screw hole in the bracket onto your roof vertical vent frame wall. Drill through the roof vent frame using a 3/16" dia. drill bit. Place one of the carriage bolts upward through the slot in the bracket and fasten the bracket to the roof vent wall using the small screw provided. The small washer, lock washer and hex nut should be placed on the inside of the roof vent frame wall. Install two brackets on each side of your roof vent as shown in the drawing.
4. Place the MAXXAIR on the four upward pointing carriage bolts and fasten using the star washers and hex nuts provided. You may have to push the head of the carriage bolt up into the bracket slot to prevent the carriage bolt from turning during tightening of the nuts.
5. A slight air gap between the MAXXAIR base and the roof after installation is normal and permits condensation to escape. Do not apply caulking to this area.

NOTE: To install over a Ventline EZ-Lift roof vent, simply install a carriage bolt into the square hole in each mounting bracket and fasten the mounting brackets to the special tabs provided on the Ventline. Use the small screw, washer, lock washer and nuts to secure the brackets to the special tabs. Proceed with step 4 above.

THIS CONCLUDES THE INSTALLATION. ENJOY YOUR NEW MAXXAIR ORIGINAL VENT COVER

TOOLS REQUIRED

POWER DRILL WITH 3/16" DRILL BIT, PHILLIPS HEAD SCREWDRIVER, ADJUSTABLE WRENCH & PENCIL

CONTENTS OF KIT


- | | |
|---------------------------------------------|----------------------------------------|
| (4) 1/4" – 20 SS Carriage Bolts (3/4" long) | (4) #8 – 32 SS Nuts |
| (4) 1/2" SS Star Washers | (4) #8 – 32 SS Screws (1/2" long) |
| (4) 1/4" – 20 SS Hex Nuts | (4) #8 SS Flat Washers (Fender Washer) |
| (4) Aluminum Brackets | (4) #8 SS Lock Washers |

SEE OUR INSTALLATION VIDEO AT www.AIRXCEL.com

* Warranty limited to repair or replacement of the MAXXAIR Original by MAXXAIR VENTILATION SOLUTIONS

THE MAXXAIR® SOLUTION FOR RV VENTILATION

MAXXFAN and MAXXFAN Plus with MOUNTING TABS

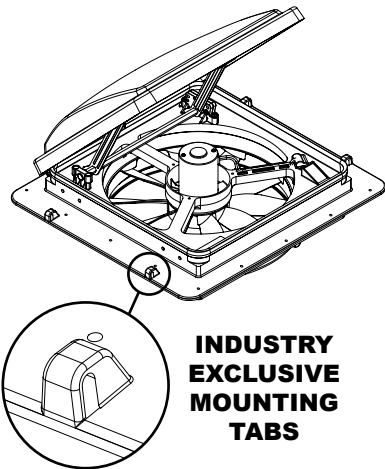

INDUSTRY EXCLUSIVE MOUNTING TABS

MAXXFAN AND MAXXFAN Plus MODELS

- ▶ BUILT-IN waterproof molded mounting tabs
- ▶ INDUSTRY EXCLUSIVE MOUNTING TABS allow for FAST and **TOOL FREE** INSTALLATION of optional MAXXAIR **FANMATE®** MODELS 755, 855, or 955 cover (sold separately).
- ▶ Twin lifting arms help prevent lid flutter in high winds or when driving.


MAXXFAN Deluxe MODELS

- ▶ BUILT-IN RAIN SHIELD eliminates the need for any additional covers to protect your interior from rain!

ALL MODELS


- ▶ Remote control models include backup controls at ceiling - A MAXXFAN EXCLUSIVE!
- ▶ Operates with lid closed to circulate air (Ceiling Fan Mode)
- ▶ Flush Mounted, easy to clean keypad controls the fan speed, thermostat, air intake and exhaust
- ▶ Provides over 900 Cubic Feet of air per minute to keep you cool and comfortable
- ▶ Installs into all standard 14" x 14" RV roof openings
- ▶ 2 YEAR* Limited WARRANTY with LIFETIME Limited WARRANTY* on lid

MAXXFAN Deluxe with BUILT-IN RAIN SHIELD

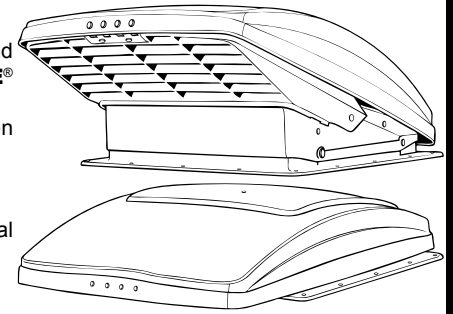

MAXXFANS are available in **MANUAL**, or **ELECTRIC REMOTE CONTROL** Opening Models
PLEASE VISIT AIRXCEL.COM FOR WARRANTY, MODEL INFORMATION AND SPECIFICATIONS *Warranty limited to repair or replacement

FANMATE® CEILING FAN VENT COVER

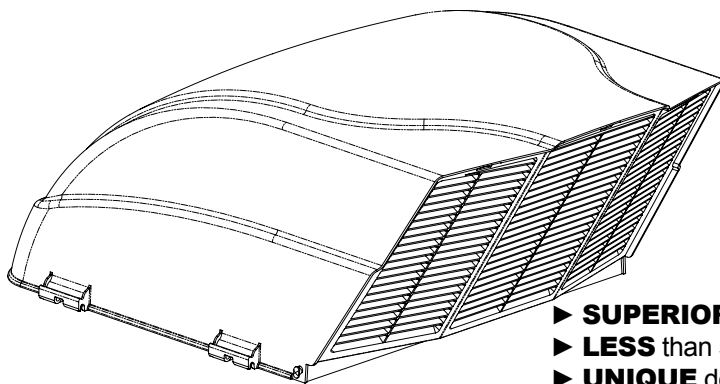


FEATURING EZClip™ HARDWARE for QUICK, EASY and TOOL-FREE INSTALLATION

The **FANMATE®** simply fits over the built-in, waterproof mounting tabs on the **MAXXFAN®** and **MAXXFAN®** Plus. Simply slide the included clip through the tab to secure the **FANMATE®** cover. (Hardware with clips included for mounting on other fan models.)

- ▶ **SUPERIOR** rain protection
- ▶ **LESS** than 5% airflow restriction
- ▶ **UNIQUE** design allows for use on ANY high powered or non-powered vent
- ▶ **OPTIONAL** bug screen
- ▶ **FULL ACCESS** to the fan and optional bug screen courtesy of the **EZClip™**
- ▶ **6-YEAR** Limited WARRANTY *Visit AIRXCEL.com for Details

TUFFMAXX A/C REPLACEMENT SHROUD

**The LAST
A/C SHROUD
you will EVER
have to BUY!**


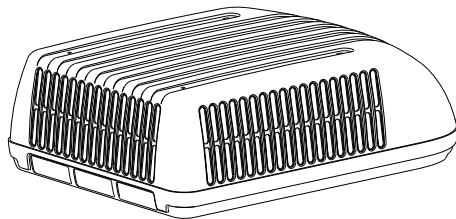


- Replaces Coleman®-Mach® 11,000, 13,500 and 15,000 BTU covers (Mach 1, Mach 3 and Mach 15 models)
- Features built-in rear fin guard and extra tough, UV protected plastic
- LIFETIME Limited WARRANTY to original owner (proof of purchase required)*
*Limited to replacement only by MAXXAIR

Coleman is a registered trademark of the Coleman Co., Inc.

MAXXAIR II MORE fresh air, rain or shine

EXCLUSIVE Side Louvers Provide
UNSURPASSED CROSS VENTILATION

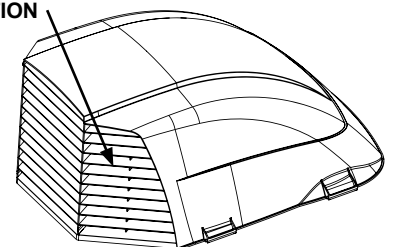

- ▶ More vent area than any other vent cover
- ▶ Hinged hardware included for easy opening - **NO TOOLS REQUIRED**
- ▶ Solid one-piece, sleek, aerodynamic design
- ▶ 6 YEAR Limited WARRANTY* - **BEST in the Industry.**



CALL YOUR DEALER FOR DETAILS

AIRXCEL, INC. - RV Products Division / MAXXAIR • 3050 N. St. Francis St. • Wichita, KS 67219 • 316-832-3400

P/N: 10B50104, REV B, 12-2015